

## SPECIFICATION

Quality		: CITY & CITYLINES
Product Definition		: Multi-Level Loop Pile
Gauge		: 1/12"
No. Of Tufts	ISO 1763	: 186.000/m <sup>2</sup>
Stitches		: 10 per inch
Pile Weight		: 680 gr/m <sup>2</sup>
Pile Height	ISO 1766	: 4,0 mm ± 0,5 mm
Primary Backing		: PA/PES non-woven
Tile Backing		: E+ Bac (Bitumen Backing)
Total Thickness	ISO 1765	: 7,0 mm ± 0,5 mm
Total Weight		: 3930 gr/m <sup>2</sup>
Tile Size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles Per Box		: 20

### PERFORMANCE

Use Classification		: 33
Abrasion	DIN 54322	: Pass
Vettermann Test	DIN 54323	: Pass
Dimensional Stability	NEN 6160	: Pass
Thermal Isolation	ISO 8302	: 0.10 m <sup>2</sup> K/W

### ELECTROSTATIC PROPERTIES


Static Loading		: Anti-Static
----------------	--	---------------

### FLAME PROPERTIES

Hot Metal Nut Test	BS 4790	: Low Radius
--------------------	---------	--------------

### COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: 5.0
Rubbing, Dry	ISO 105 X12	: 5.0
Rubbing, Wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.8
Water	ISO 105 E01	: 4.8

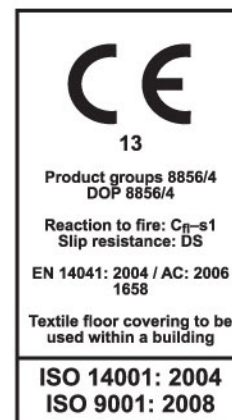

### GENERAL

Recommended Maintenance	: Best results are obtained when cleaned a with dry shampoo method.
Pile Direction	: Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.
Laying Instructions	: Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m <sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.